

# **UT SERIES**

Enjoy the beauty comes from it's transparency and light design

# **UT** SERIES

Enjoy the beauty comes from it's transparency and light design





Lightweight design



Higher transparency rate



Super convenient installation and maintenance



One-button hollowing design



For indoor and outdoor applications




Multi-function splicing installation



#### **Shenzhen Dicolor Optoelectronics Co.,Ltd.**

Address: No.13 Huiye Road, Tangjia Community, Fenghuang Street, Guangming District, Shenzhen, China
Tel: +86-755-32901555 Fax: -86-755-29604042
E-mail: inquiry@dicolor.cn Website: www.dicolor.cn



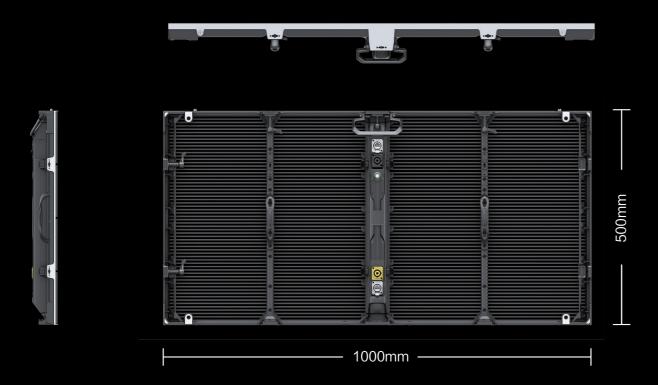

#### 产品参数

Product	UT-390	
Pixel Pitch (mm)	3.91-7.81	
Cabinet size (WxHxD/mm)	1000×500	
Cabinet Resolution	256×64	
Cabinet Weight (Kg)	5.3	
Brightness (Nits)	2500-3000	
Gray Scale (Bit)	14	
Refresh Rate (Hz)	≥3840	
Max./Avg Power Consumption(W/m2)	416/139	
IP Rating (Front/Rear)	IP65/IP54	

### Lightweight design

The weight of one cabinet is only 5.3kg, leading the industry design, save installation time and labor cost.





# Super convenient installation and maintenance

The integrated design of the control box enables fast maintenance.

Each cabinet indenpendently design, which can easily take out even during events and improve the miantenance efficiency.



#### For indoor and outdoor applications

The use of a dedicated driver chip can effectively reduce grayscale loss at low brightness, and one product has two benefits.






#### Higher transparency rate

The transparency rate is 50%,Lower wind resistance,Get the perfect combination of stage and art.



# One-button hollowing design

Hollowing or not hollowing is optional to meet the needs of different scenes, one investment and two applications (optional function).

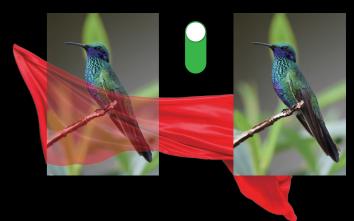

### Multi-function splicing installation

The product supports internal and external right-angle splicing, dislocation splicing, and curve splicing to meet your creative display needs.

